

**AGI**

**BATCO**

# SHORT CONVEYORS






## Regular Hopper Conveyors



### DRIVE OPTIONS

MODEL	HYDRAULIC	HP ELECTRIC
TCX 1222	✓	✓
TCX 1227	✓	✓
TCX 1232	✓	✓
1535 TD	✓	✓
1540 TD	✓	✓
1545 TD	✓	✓

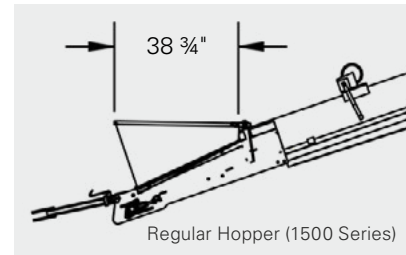


MODEL	BELT LENGTH	WEIGHT LBS.	UP OPERATION		DOWN OPERATION		WIDTH
			A	B	A	B	
TCX 1222	46' 6"	1000	10' 8"	7' 9"	7' 11"	8' 4"	8'
TCX 1227	56' 2"	1030	13' 3"	9' 2"	8' 11"	9' 11"	8'
TCX 1232	66'	1150	16' 4"	14' 6"	8'	14' 10"	8'
1535 TD	70' 2"	1582	16.8"	12"	10.7"	12.8"	7.5'
1540 TD	80' 2"	1681	18.8"	15.2"	11.2"	15.5"	7.5'
1545 TD	90' 2"	1780	21.5"	19.1"	11.9"	19.5"	7.5'

### TCX 12 Series

- Capacity rated up to 3,800 BPH
- 2-Ply Chevron Belt with Poly Slider Backing
- 205-75-14 Tires
- Collapsible Intake Hopper
- Manual Lift Winch
- Standard with Weather Guards
- Poly Return Rollers
- Powder Coat Paint
- Available in 22', 27' and 32' lengths

### 1500 Series




- Capacity rated up to 6,000 BPH
- 2-Ply Chevron Belt with Nylon Slider Backing
- Available in lengths from 35' - 45'
- 10" diameter, 14 GA tube
- Standard with Weather Guards
- Powder Coat Paint
- 40' and 45' come standard with pinch top drive

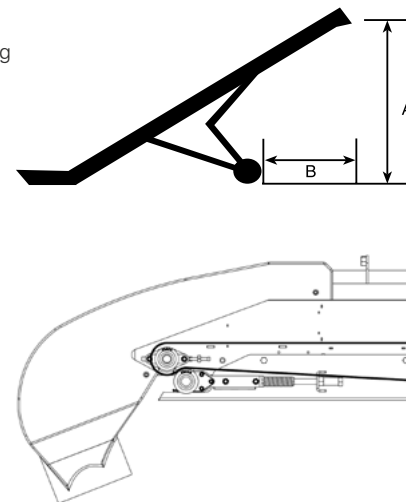

### Pinch Top Drive

Unique to AGI Batco, the true pinch top drive allows for maximum drive roller traction in all types of conditions. Electric or hydraulic drive options available.

## Field Loader Conveyors

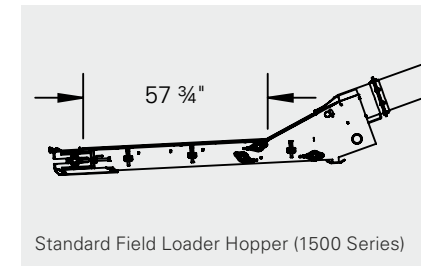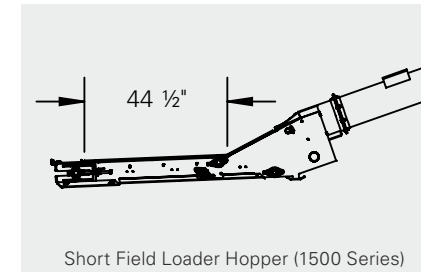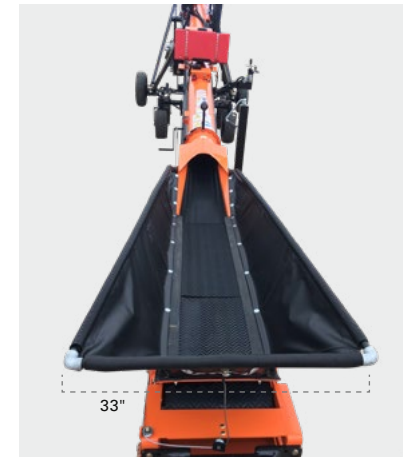


### DRIVE OPTIONS

MODEL	PINCH TOP DRIVE	PINCH S-DRIVE	HYDRAULIC	ELECTRIC	GAS	PTO
1539 FL	✓	✓	✓	✓	✓	—
1544 FL	✓	✓	✓	✓	✓	✓
1549 FL	✓	✓	✓	✓	✓	—
2045 FMD	—	✓	—	✓	✓	—

MODEL	BELT LENGTH	WEIGHT LBS.	UP OPERATION (A)	DOWN OPERATION (A)	WIDTH	PTO HP	ELEC HP	GAS HP	HP HYD (CU.IN)
BCX <sup>2</sup> 1539 FL S-Drive	87'2"	1950	17'	12.5'	7.5'	N/A	10-12.5	32-33	N/A
BCX <sup>2</sup> 1539 FLTD	82'5"	1630	17'	11.3'	7.5'	N/A	10-12.5	N/A	6.2 (2000 SERIES)
BCX <sup>2</sup> 1539 FLTD Short	80'	1630	17'	11.3'	7.5'	N/A	10-12.5	N/A	6.2 (2000 SERIES)
BCX <sup>2</sup> 1544 FLTD	92'5"	1750	18.5'	11.5'	7.5'	N/A	10-12.5	N/A	6.2 (2000 SERIES)
BCX <sup>2</sup> 1544 FLTD PTO	92'5"	1850	18.5'	11.5'	7.5'	30	N/A	N/A	N/A
BCX <sup>2</sup> 1544 FLTD Short	90'	1700	18.5'	11.5'	7.5'	N/A	10-12.5	N/A	6.2 (2000 SERIES)
BCX <sup>2</sup> 1549 FLTD	102'5"	1936	22.9'	13.2'	7.5'	N/A	12.5-15	N/A	6.2 (2000 SERIES)
BCX <sup>2</sup> 1549 FLTD Short	100'	1936	22.9'	13.2'	7.5'	N/A	12.5-15	N/A	6.2 (2000 SERIES)
BCX <sup>2</sup> 1549 FL S-Drive	107'2"	2275	22.9'	12.4'	7.5'	N/A	15	32-33	N/A
FX 2045 FL S-Drive	114'	3775	20'	13'	8.4'	N/A	20	35-37	N/A

### BCX<sup>2</sup>

- Capacity ranges from 6,000 up to 10,000 BPH
- Narrower hopper clearance at the transition, so you can get into tighter spaces
- Upgraded hopper cloth frame which is stronger and easier to replace
- Removable skid plate under intake hopper protects the belt and stops debris from getting onto the belt and into your truck or air seeder!
- Enhanced intake design and transition for increased flow
- Angle indicator for positioning
- S-drive tension indicators for easy adjustment
- High-performance grip tires
- Choose from two optional gas engines; the 33 EFI or 32 HP Carb

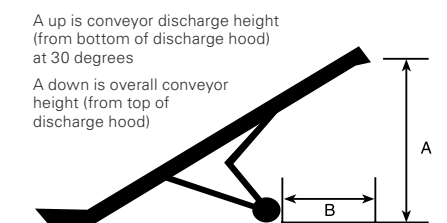

### 2045 FL FMD

- Capacity rated up to 14,000 BPH
- 14" diameter, 12 GA tube

